



RESOURCE MANAGEMENT AGENCY

5961 SOUTH MOONEY BLVD
VISALIA, CA. 93277
PHONE (559) 624-7000
FAX (559) 730-2653

Michael Washam Economic Development and Planning
Benjamin Ruiz, Jr. Public Works
Roger Hunt Administration

MICHAEL C. SPATA, DIRECTOR

December 3, 2015

TO: Planholders for Construction of Road 108 Street Improvement Project

SUBJECT: ADDENDUM NUMBER 1

Planholders,

The following additions, deletions or modifications have become part of the Contract Documents and Plans for the construction of **Road 108 Street Improvement Project**.

Item No.1

Bid Item 11 – Pipe 6” PVC Schedule 40 add the following:
Pipe 6” PVC Schedule 40 **or SDR 35**

Item No.2

Add Bid Item 22 as follows: Paint Traffic Stripe (2-coats) 366 linear foot
Replace page P-3 of Proposals with attached Addendum No. 1 for bid submittal.

Item No.3

Add Bid Item 21 as follows: Survey Monument 1 each.
Replace page P-3 of Proposals with attached Addendum No. 1 for bid submittal.

Item No.4

Add Section 81 Monuments and the following:

Replace 2nd sentence from Section 81-1.02 with:

Contractor furnishes survey marker disk which shall be 2 inch diameter flat brass monument marker scribed with “TULARE COUNTY SURVEYOR” in a circular pattern on the outer radius. Survey marker shall be a Surv-Kap, product code M/M-B2S or approved equivalent.

Add to Section 81-1.03:

Prior to the time of any construction, survey monuments in the construction area shall have corner record or record of survey filed with the County Surveyor. The monuments shall be located and referenced by or under the direction of a licensed land surveyor or licensed civil engineer legally authorized to practice land surveying.


Any disturbed, destroyed, damaged, covered or otherwise obliterated survey monuments shall be reestablished, reset or relocated in the original or same horizontal location. The reestablished or reset survey monument marker shall be stamped with markings as specified and a corner record or record of survey be filed with the County Surveyor prior to the recording of a certificate of completion for the project.

Item No.5

Add following detail to plans:


SURVEY MONUMENT NOTES:

1. All monuments and references shall be permanently stamped pursuant to Bus. and Prof. code sec. 8772.
2. Street monument for Gov't. corners and tract boundary corners shall be capped galvanized iron pipe 2" in diameter x 24" in length minimum pursuant to Gov't. code sec. 27580 and Tulare County Ord. code sec. 7074.
3. Other street monuments including centerline intersections and beginning and end of curves shall be 1/2" in diameter x 18" in length minimum pursuant to Tulare County Ord. code sec. 7074.
4. All existing survey monuments in the construction area shall have corner record or record of survey filed with the county surveyed prior to actual construction and conform to contract specification. Any disturbed or obliterated survey monuments must conform to survey monument details & contract specification.

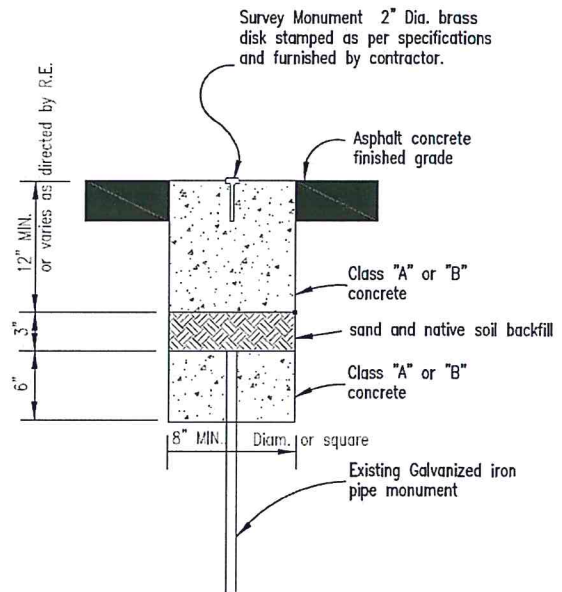

This addendum is available for download on the Tulare County website at:
<http://www.tularecounty.ca.gov/rma/index.cfm/public-works/public-works-projects/request-for-bid-proposals-for-construction-projects/>

Sincerely,

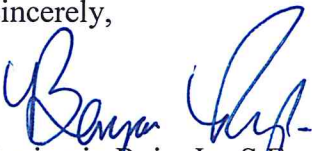
 Benjamin Ruiz, Jr., S.E.

Assistant Director - Public Works

**TULARE COUNTY RESOURCE MANAGEMENT AGENCY
ROAD 108 STREET IMPROVEMENTS PROJECT**

ADDENDUM NO. 1

Item No.	BEES NUMBERS	Items with unit price written in words	Unit of Measure	Estimated Quantity	Unit Price	Amount
14	250201	Class 2 Aggregate Subbase _____per cubic yard.	CY	1243		
15	390133	Hot Mix Asphalt (Type A) _____per ton	TON	1237		
16	568023	Install Roadside Sign _____per each	EA	2		
17	665010	Pipe 12" Corrugated Steel Pipe (CMP) _____per linear foot.	LF	37		
18	665017	Pipe 18" Corrugated Steel Pipe (CMP) _____per linear foot.	LF	108		
19	750030	Inlet Frame & Grate Modified Type "A" _____per each.	EA	6		
20	760020	Exploration Hole _____per lump sum.	LS	1		
21	810111	Survey Monument _____per each	EA	1		
22	840501	Paint Traffic Stripe (2-coats) _____per linear foot.	LF	366		

(F) = Final Pay Item

TOTAL (In words and numbers)_____
